




- ▷ 安装简便;
- ▷ 设置空间极小;
- ▷ 直接连接接头部位;
- ▷ 轻量发生器。

订购码/Ordering NO.

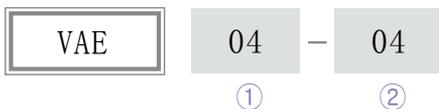

① 供气孔/Air Port

M5	M5x0.8
18	PT 1/8
14	PT 1/4
38	PT 3/8
04	Ø4
06	Ø6
08	Ø8

② 真空孔/Vacuum Port

M5	M5x0.8
18	PF 1/8
14	PF 1/4
04	Ø4
06	Ø6
08	Ø8

▶ 规格/Specification


供气压力	0.1 ~ 0.7 MPa
工作温度	0 ~ 60°C
供气类别	Clean Air
材质	PBT, Brass
最大真空度	-89 kPa

性能表/Characteristics

型号	管径 (mm)	最大真空度 -kPa (-mmHg)	空气消耗量 (Nl/m)	最大吸流量 (Nl/m)	使用压力范围
VAE-M5-M5	Ø1	-89 (-670)	54	28	0.1~0.7 MPa
VAE-18-04	Ø1.5		123	63	
VAE-14-06	Ø1.8		182	89	
VAE-38-08	Ø2.2		270	134	
VAE-04-M5	Ø1.5		123	63	
VAE-06-18	Ø1.8		182	89	
VAE-08-14	Ø2.2		270	134	
VAE-04-04	Ø1.5		123	63	
VAE-06-06	Ø1.8		182	89	
VAE-08-08	Ø2.2		270	134	


注) 供气压力 0.5MPa基准。

 VAE Series 外形尺寸/Dimensions

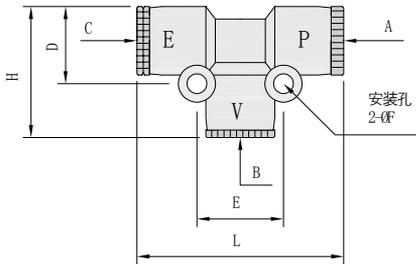


(mm)

MODEL	A	B	C	D	E	F	H	L
VAE-M5-M5	M5 x0.8	M5 x0.8	M5 x0.8	12.4	13.8	Ø3.2	21	33

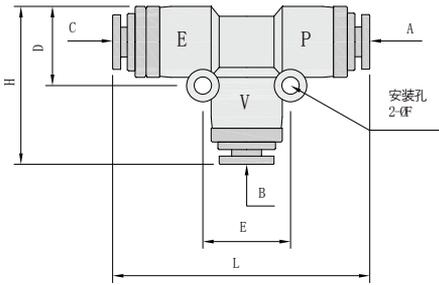


(mm)

MODEL	A	B	C	D	E	F	H	L
VAE-Ø4-Ø4	Ø4	Ø4	Ø4	14.5	16	Ø3.2	47.1	47.1
VAE-Ø6-Ø6	Ø6	Ø6	Ø6	16.3	17.6	Ø3.2	45.2	45.2
VAE-Ø8-Ø8	Ø8	Ø8	Ø8	19.6	21.1	Ø4.3	54.8	54.8

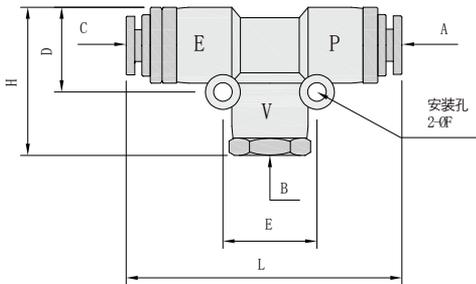

(mm)


MODEL	A	B	C	D	E	F	H	L
VAE-Ø4-M5	Ø4	M5x0.8	Ø4	14.5	16	Ø3.2	25.4	47.1
VAE-Ø6-18	Ø6	PF1/8	Ø6	16.3	17.6	Ø3.2	28	45.2
VAE-Ø8-14	Ø8	PF1/4	Ø8	19.6	21.1	Ø4.3	32.3	54.8

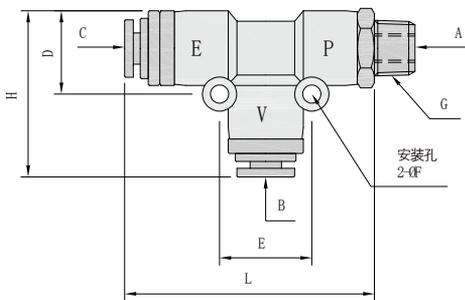


(mm)

MODEL	A	B	C	D	E	F	G	H	L
VAE-18-Ø4	M5x0.8	Ø4	Ø4	14.5	16	Ø3.2	PT1/8	29	43.5
VAE-14-Ø6	M5x0.8	Ø6	Ø6	16.3	17.6	Ø3.2	PT1/4	31.4	41.9
VAE-38-Ø8	PT1/8	Ø8	Ø8	19.6	21.1	Ø4.3	PT3/8	37	49.6


 示例/Example

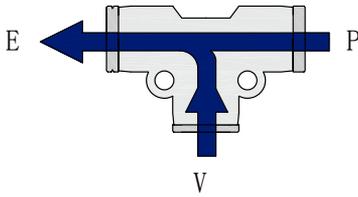


MODEL	P	V	E
VAE-M5-M5	M5x0.8	M5x0.8	M5x0.8

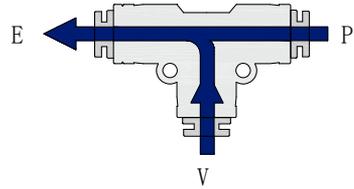


MODEL	P	V	E
VAE-04-04	Ø4	Ø4	Ø4
VAE-06-06	Ø6	Ø6	Ø6
VAE-08-08	Ø8	Ø8	Ø8

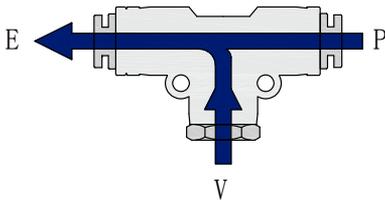


MODEL	P	V	E
VAE-04-M5	Ø4	M5x0.8	Ø4
VAE-06-18	Ø6	PF 1/8	Ø6
VAE-08-14	Ø8	PF 1/4	Ø8

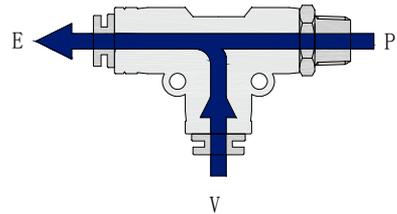

MODEL	P	V	E
VAE-18-04	PT 1/8	Ø4	Ø4
VAE-14-06	PT 1/4	Ø6	Ø6
VAE-38-08	PT 3/8	Ø8	Ø8

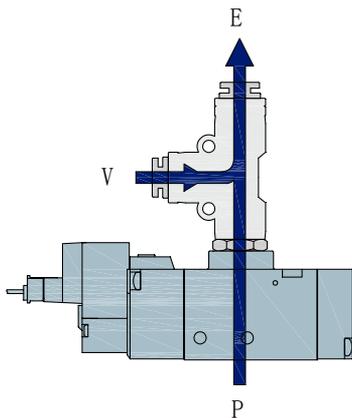

< 阀 直接安装 >

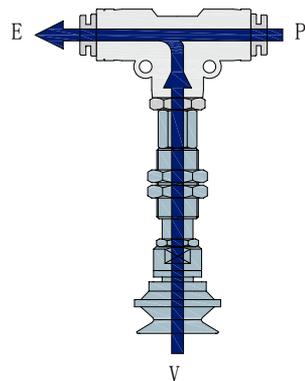

< 吸盘 直接安装 >

 注意事项

使用前请充分熟读，安全及共同注意事项
请参考序文。

 注意事项

- 禁止气管道内进入异物。
- 拔出气管时请排出气管内的空气。
- 排管时使用扳手固定六角部位。